



Mobile Computer MC 9090^{ex}-G

Features

- Real time data access
- Maximum usage between charges with rechargeable lithium-ion battery
- WLAN radio technology IEEE 802.11a/b/g
- Bluetooth

Description

The MC 9090^{ex}-G Mobile Computer version with a pistol grip is a compact unit for safe barcode scanning in hazardous areas.

The scan trigger is conveniently positioned at the pistol grip. Thus barcodes can be captured with only one hand. The integrated radio module enables real time data access to your host system.

The MC 9090^{ex}-G combines the strength of Microsoft's Pocket PC platform with the power of the Intel® XScale™ PXA270 processor with 625 MHz.

A further highlight is the large easy-to-read 1/4 VGA color display with touchscreen technology. The MC 9090^{ex}-G is working with the IEEE 802.11a/b/g radio standard (direct sequence).

Technical data

Keyboard

28, 43 and 53 keys

Display

3.8", 1/4 VGA colour display

Barcode options

1D-Long Range Scan Engine

Dimensions (height x width x depth)

234 mm x 91 mm x 193 mm
(9.2 in x 3.6 in x 7.6 in)

Weight

Approx. 1050 g (approx. 33 oz)

Ambient temperature

-20 °C up to +40 °C (-4 °F up to 104 °F)

Storage temperature

-25 °C up to +70 °C (-13 °F up to 158 °F)

Humidity

5 % to 95 % (non-condensing)

Protection class

IP 54 (EN 60529)

CPU

XScale™ PXA270 processor at 625 MHz

Memory

64/128 MB
Additional memory (SD card)
512 MB, 1 GB, 2 GB on request

Operating system

Windows Mobile 2005

Power supply

Replaceable, Li Ion battery pack
(2200 mAh/7.4 V)

Only charge in the safe area!

Backup battery

Ni-MH Battery (rechargeable)
20 mAh/3.6 V

Interface

RS232: max. 115200 bps min. 1200 bps
USBv1.1 (Client)

Application development

SDK available through Symbol
Developer Zone Web site

Explosion protection

Ex protection type

II 2G EEx q [ib] IIC T4

Certification

in preparation

Devices are also available for the North-American market on request.

Market	Applications	Users
Automobile industry (suppliers of paintwork, for paint shops, etc.)	Material flow monitoring Production control Supplier chain management	Personnel in the dispatch, receiving and stock management departments who have received instruction on the handling of potentially explosive substances.
Food and beverages (suppliers of aromatic substances, etc.)	Incoming/outgoing goods, inventory management Safety tests Spare parts tracking	Maintenance and repair personnel who have received instruction for deployment in potentially explosive areas.
Petrochemicals (from production through further processing to delivery)	Maintenance / repair work Workshop communication Conformity assessment Allocation of tasks	Personnel in the production area who have received instruction on the handling of potentially explosive substances.
Pharmaceuticals (suppliers of individual components required for production e.g. medication)		



The MC 9090^{EX}-G Mobile Computer identifies the following barcodes with the 1D-Long Range Scan Engine:

Code 11	Codabar
Code 39	Coupon Code
Code 93	Discrete 2 of 5
Code 128	EAN-8
EAN-13	UPCE
Interleaved 2 of 5	UPC/EAN supplementals
MSI	Trioptic 39
UPCA	Webcode

- **WLAN IEEE 802.11a/b/g**
Symbol Spectrum24, IEEE 802.11a/b/g, (Direct-Sequence Topologie)

Output power
100 mW (international)

Max. Data rate
IEEE 802.11b: max. 11 Mbps
IEEE 802.11a/g: max. 54 Mbps

Antenna
Internal

Frequency range
country dependently
IEEE 802.11b/g: 2.4 to 2.5 GHz
IEEE 802.11a: 5 GHz


- **Bluetooth**
- PAN (Bluetooth support)**
Bluetooth v1.2 radio with BT Explorer (manager included)

Max. Data rate
1 Mbps

Antenna
Internal


- Accessories for the safe area**
- Single Slot Cradle (Docking station for communication with the PC)
 - Rapid charging station UBC 2000 (Basic station 4-slot)
 - Battery adapter for UBC 2000 (with discharge option)

Connection possibility

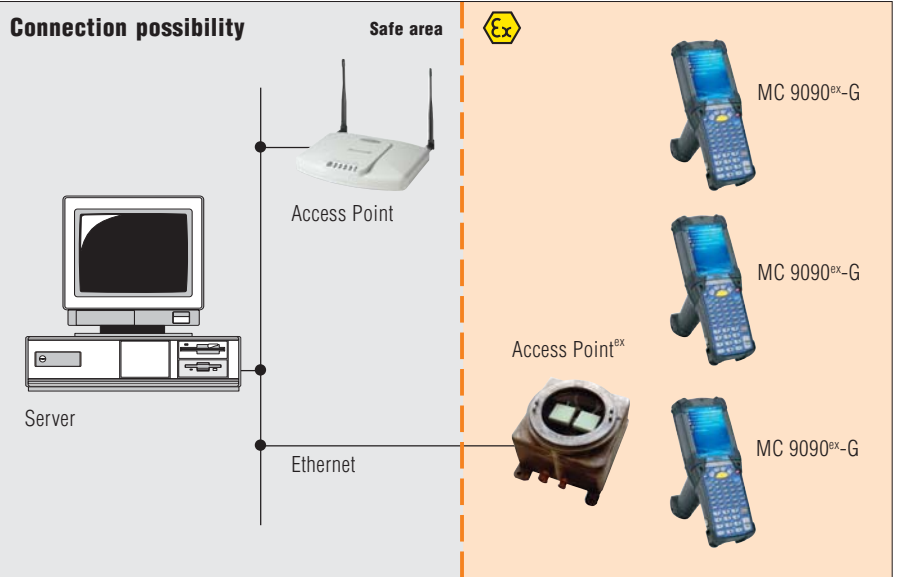

Decode zone

Note: Typical performance at 73.4 °F (23 °C) on high quality symbols

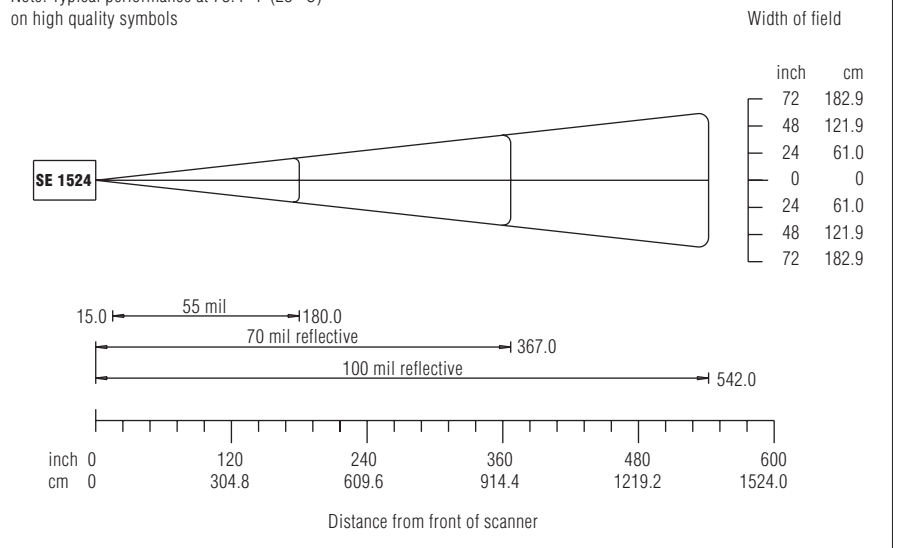

Selection chart Mobile Computer MC 9090^{EX}-G

Number of keys	Key options	Code no.
28 keys	alphanumeric via function keys	A
43 keys	alphanumeric via function keys	F
53 keys	alphanumeric	E
53 keys	with additional key code for VT Emulation	G
53 keys	with additional key code for 3270 Emulation	H
53 keys	with additional key code for 5250 Emulation	J

➔ **Complete order no. 17-A119-0GJO/HJ** **FA600**

Please insert correct code. Technical data subject to change without notice.
Note: All variants without accessories.